


## Horizontal or Vertical Scale Unit

Lets you measure and position any assembly on fixtures, presetting devices for tooling or machines. Flexible mounting for use in any position.

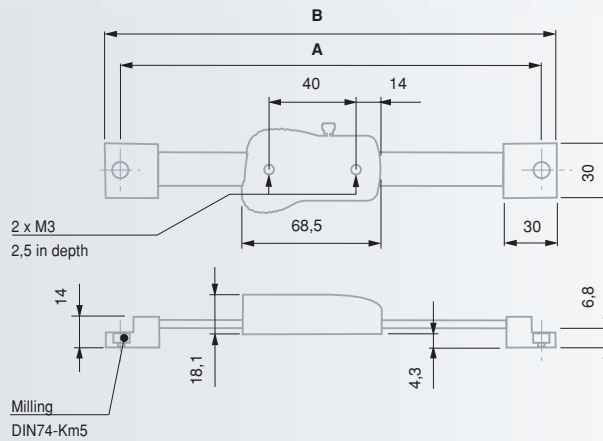

	mm	in	A mm	B mm
<b>00530271</b>	0 ÷ 150	0 ÷ 6	265	278
<b>00530272</b>	0 ÷ 200	0 ÷ 8	315	328
<b>00530273</b>	0 ÷ 300	0 ÷ 12	415	428
<b>00530274</b>	0 ÷ 600	0 ÷ 24	725	738
<b>00530275</b>	0 ÷ 1000	0 ÷ 40	1135	1148

### Optional Accessory

**01961000** 3V lithium battery, 190 mAh, type CR 2032.  
For connecting cables, see section N.



Factory standard

See table

0,01 mm  
0.0005 in

LCD, 7 mm

Floating zero

Display lock

mm / in conversion

See page A-2

Steel scale with incremental divisions, magnetic

> 1,8 m / s

RS 232 opto-coupled, mono- and bi-directional

Hardened stainless steel

3V lithium battery, CR 2032

≈ 1,5 a  
(≈ 2000 h / a)

Idle mode after 10 min., automatic switch off after 2 h.

10°C to 40°C

-10°C to 60°C

100%

IP67  
(IEC 60529)

EN 50081-1  
EN 50082-1

Suited carrying case

Identification number

Inspection report with a declaration of conformity

