









TESA-HITE 400 / 700

Precision in motion

The two TESA-HITE 400 and 700 height gauges are fitted with the patented, opto-electronic TESA's measuring system with incremental glass scale. Due to their robust and reliable construction, they are ideally suited for dimensional inspection on the shop floor.

Full autonomy is ensured through battery power. Each model allows height or step dimensions, diameters, centre-to-centre distances, groove width and the like to be accurately measured. Excellent price/performance ratio.



- Wide application range, two sizes available with measuring span of 415 mm / 16 in or 715 mm / 28 in, respectively.
- Integrated air-bearing for easy displacement across the granite plate.
- Electronics totally protected against oil and water splashing, dust particles (IP65).
- Control panel with numerical display to 0,0001 / 0,001 / 0,01 mm or 0.00001 / 0.0001 / 0.001 in.
- Dynamic probing of the workpiece with a constant measuring force.
- Easiness, high reliability when checking bores or shafts using TESA's unique device for automatic detection of the culmination point – patented.
- Acoustic signal to acknowledge value capture, also conveniently programmable.
- Ability to measure any deviation in parallelism.
- Possible use of a digital sensor for determining perpendicularity errors with stated angle of the linear regression line.
- Patented TESA's opto-electronic system. Long-lasting stability of the glass scale for unbroken high accuracy.
- Large LC display with symbols for the measuring functions.
- Zero-setting anywhere within the measuring range.
- PRESET function for entering any given value.
- Metric/inch conversion.
- RS 232 data output.
- SCS calibration certificate provided with each height gauge.



TESA-HITE 400/700



00730043 TESA-HITE 400 height gauge
 Measuring span 415 mm / 16 in
 Application range 0 ÷ 570 mm / 0 ÷ 22 in

00730044 TESA-HITE 700 height gauge
 Measuring span 715 mm / 28 in
 Application range 0 ÷ 870 mm / 0 ÷ 34 in

Each height gauge is supplied with the following standard accessories:


- 00760143** 1 Standard insert holder
- 00760164** 1 Standard insert with a 5 mm dia. tungsten carbide ball tip
- 00760219** 1 Master piece for establishing the probe constant, nominal dimension to 6,350 mm / 0.2500 in
- 00760226** 1 Electric pump for creating the air-cushion beneath the gauge base, already mounted
- 00760157** 1 Rechargeable battery, 6V
- 04761054** 1 Mains adapter 100 ÷ 240 Vac/50 ÷ 60 Hz
- 04761055** 1 Cable EU for mains adapter
- 04761056** 1 Cable US for mains adapter

- See table opposite
- EN 61326, Class B (with disconnected charger)
- Shipping packaging
- Identification number
- Declaration of conformity
- SCS calibration certificate

Technical data

| | | | TESA-HITE 400 | TESA-HITE 700 |
|--|-------------------------------------|----------|---|--------------------|
| | | mm in | 415 16 | 715 28 |
| | With standard accessory | mm in | 0 ÷ 570 0 ÷ 22 | 0 ÷ 870 0 ÷ 34 |
| | With insert holder No. 00760057 | mm in | 0 ÷ 625 0 ÷ 24 | 0 ÷ 925 0 ÷ 36 |
| | With insert holder No. S07001622 | mm in | 0 ÷ 795 0 ÷ 31 | 0 ÷ 1095 0 ÷ 43 |
| | With standard accessory | µm in | (2,5+4•L) µm (L in m) (0.0001+0.000004•L) in (L in in) | |
| | With standard accessory | | Flat surfaces: 2δ = <2 µm / <0.0001 in Holes: 2δ = <3 µm / <0.00015 in | |
| | Frontal, mechanical | µm in | 9 0.00035 | 13 0.0005 |
| | | kg | 27 | 32 |


Standard Accessories for TESA-HITE 400 / 700

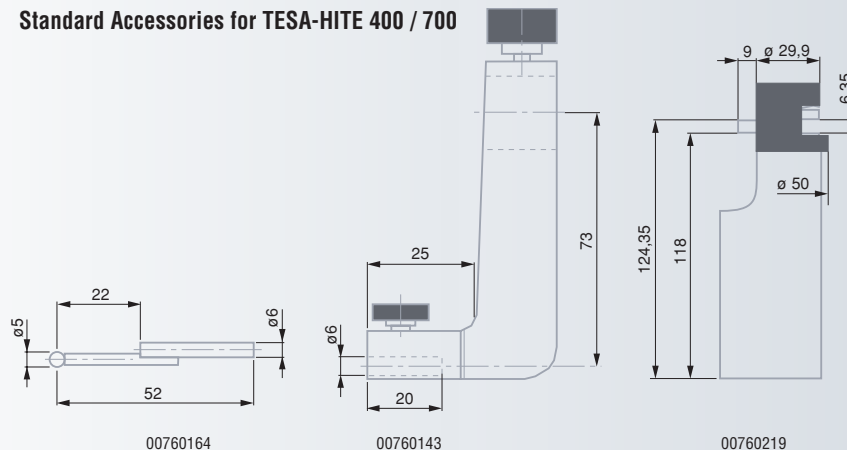


Standard Accessories for TESA-HITE 400 / 700

| | |
|-----------------|---|
| | |
| 04760070 | RS port. Used to connect a digital sensor for perpendicularity measurement |
| 04761052 | RS 232 connecting cable (PC to TESA PRINTER SPC) For additional accessories, report to page M-25 |


One-Dimensional Measurement

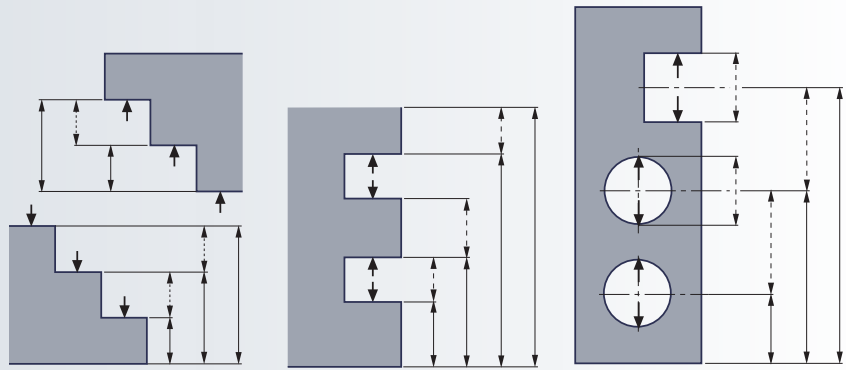

Perpendicularity Measurement



Parallelism Measurement



Configuration for Perpendicularity Measurement

